
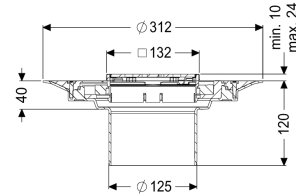


Variofix upper section Kessel des cov, 304 SST, Lock&Lift, L15

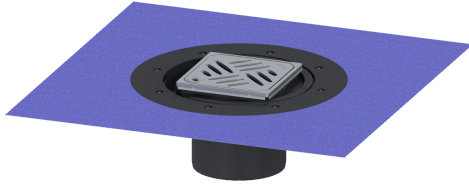

Article information

Item no.: 48904
 GTIN: 4026092028841
 Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:	125
Seal:	Lip seal
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I

General characteristics

ATEX:	no
-------	----

Dimensions

Vertical adjustment:	10 - 23 mm
Net weight:	1,55 kg
Gross weight:	1,77 kg
Diameter:	312 mm
Type of height adjustability:	vertically adjustable upper section
Height:	120 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Coverage features

Type of cover:	Design cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Frame material:	Stainless steel 14301
Locking:	Lock & Lift
Load class:	L 15 (EN 1253-1)
Grating design:	Kessel
Slip resistance class:	R9 according to DIN 51130; C according to DIN 51097
Rim width:	132 mm
Rim length:	132 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS