


## Replacement pump, Minilift F with seal monitoring

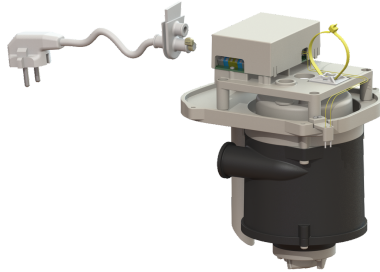

### Article information

Item no.: 680546  
 GTIN: 4026092075111  
 Price group: 90

### Description

Replacement pump for Minilift F

#### Dimensions

Net weight:	3,89 kg
Gross weight:	4,89 kg
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

#### Pumping device

Number of pumps:	1
Connection type:	Schuko (earthed contact) 2-pin
Operating voltage:	230 V
Mains frequency:	50 Hz
Rated current:	2,8 A
Temperature monitoring:	integrated
Max. temperature (permanent) of conveyed material:	35 °C
Max. pumping height:	6,4 m
Speed:	2900 U/min
Power P1:	0,65 kW
Power P2:	0,35 kW
Operating mode:	S3 - 30 %
Type of pump connection cable:	H03 VV-F 3G 0.75 mm <sup>2</sup>
Impeller type:	Macerator
Length of mains cable for pump:	1,6 m

#### Control

Connection type:	Schuko (earthed contact) 2-pin
------------------	--------------------------------