


Replacement pump SPF 300 KE 2.0 Homogeniser, 3,0 kW

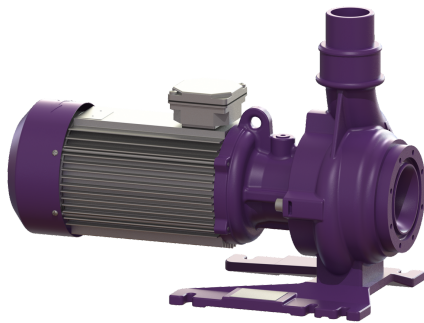

Article information

Item no.: 917856
 GTIN: 4026092055823
 Price group: 90

Description

Homogeniser pump for grease separators

General characteristics

ATEX: no

Dimensions

Net weight: 55,5 kg
 Gross weight: 57 kg
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Pumping device

Pump: SPF 300 KE 2.0
 Connection type: Direct connection
 Operating voltage: 400 V
 Mains frequency: 50 Hz
 Rated current: 6,2 A
 Protection class: I
 Protection class (pump): IP 55
 Temperature monitoring: integrated
 Max. temperature (permanent) of conveyed material: 35 °C
 Max. pumping height: 17 m
 Speed: 2850 U/min
 Power P1: 3,6 kW
 Power P2: 3 kW
 Operating mode: S2 - 30 min.
 Type of fuse required (electrical protection): Fuse protection through control unit 400 V
 Type of pump connection cable: H07RN-F 7G 1.5 mm²
 Impeller type: Radial impeller with macerating system
 Length of mains cable for pump: 5 m

Control

Connection type:

Type of fuse required (electrical protection):

Direct connection

Fuse protection through control unit 400 V