


## Drain body The Universal DN 100, AISI304 grat., Backwater protect

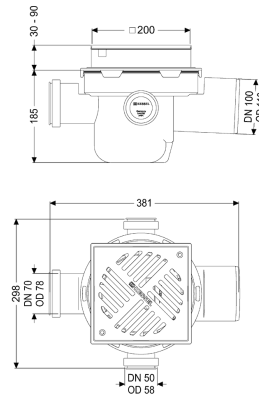

### Article information

Item no.: 27621  
 GTIN: 4026092007839  
 Price group: 10

### Advantages

- Flexible installation: vertically adjustable upper section rotatable
- Integrated backwater protection
- vertically adjustable

### Description

The polymer drain body is equipped with a removable backwater valve with two backwater flaps, one hand-lockable emergency closure and a sludge bucket. The drain body also has two inlets DN 50 and one inlet DN 70 with blind plug.  
 Material:

PP

#### Variant

|                             |                              |
|-----------------------------|------------------------------|
| Contents of sludge trap:    | yes                          |
| Emergency closure:          | yes                          |
| Waterproof flange:          | Pre-assembled at the factory |
| Mechanical backwater flaps: | 2                            |

#### General characteristics

|                         |                         |
|-------------------------|-------------------------|
| Colour:                 | black                   |
| Standard:               | EN 1253, EN 13564       |
| Nominal size (DN):      | 100                     |
| Outer diameter (OD):    | 110 mm                  |
| Type of wastewater:     | without sewage          |
| Installation situation: | floor slab installation |
| Delivery state:         | installation-ready      |
| Backwater protection:   | Type 5                  |
| Odour trap:             | included                |

**Dimensions**

|                               |                                     |
|-------------------------------|-------------------------------------|
| Net weight:                   | 3,23 kg                             |
| Gross weight:                 | 3,55 kg                             |
| Cutout dimension, width:      | 320 mm                              |
| Cutout dimension, length:     | 400 mm                              |
| Installation depth:           | 216 - 266 mm                        |
| Type of height adjustability: | vertically adjustable upper section |
| Length:                       | 380 mm                              |
| Width:                        | 300 mm                              |
| Packaging dimension:          | length                              |
| Packaging dimension:          | width                               |
| Packaging dimension:          | height                              |

**Tank/drain body**

|                 |         |
|-----------------|---------|
| Socket version: | lateral |
|-----------------|---------|

**Coverage features**

|                          |                       |
|--------------------------|-----------------------|
| Type of cover:           | Slotted cover         |
| Cover material:          | Stainless steel 14301 |
| Colour of cover:         | silver                |
| Load class:              | K 3 (EN 1253-1)       |
| Grid size, length:       | 187 mm                |
| Grid size, width:        | 187 mm                |
| Grid size, height:       | 4 mm                  |
| Contents of sludge trap: | yes                   |

**Cover**

|                    |        |
|--------------------|--------|
| Grid size, length: | 187 mm |
| Grid size, width:  | 187 mm |
| Grid size, height: | 4 mm   |