


## Pumping station Aquapump XL Duo, SPF 1500-S1, D0

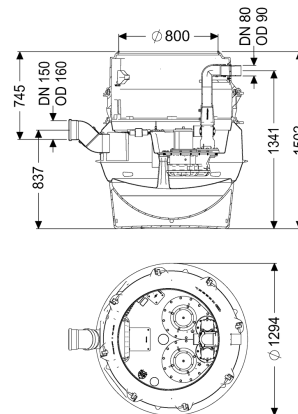

### Article information

Item no.: 8742021  
 GTIN: 4026092069578  
 Price group: 60

### Advantages

- Maximum safety
- Flexible installation
- Hygienic advantages for maintenance and repair

### Description

The pumping station for wastewater with and without sewage is equipped with one or two submersible pumps, a backflow preventer and a shut-off valve for the pressure pipe. The collection tank made of permanently resistant polymer (PE) has a closed pump tank (dry installation) with a screwed-on access cover. The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact. Alternatively, alarm and collective fault messages can be output via a GSM interface. The KESSEL modular system provides different upper sections and engineering chamber options as accessories.

#### Variant

|                             |   |
|-----------------------------|---|
| Note on installation depth: | Version with lowest installation height |
| Type of system:             | duo pump                                |
| Shut-off valve:             | Shut-off valve made of polymer          |
| Access steps:               | yes                                     |
| Installation:               | Dry installation                        |
| Pump control:               | Control unit                            |
| Backflow preventer:         | integrated                              |
| Pressure pipe connection:   | horizontal                              |

#### General characteristics

|                     |             |
|---------------------|-------------|
| Colour:             | black       |
| Standard:           | EN 12050-1  |
| Type of wastewater: | with sewage |

|  |  |
|--|--|
| Installation situation:                                | underground installation   |
| Delivery state:  | Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected) |
| System type:   | Duo  |
| ATEX:  | no   |
| Dimensions   |  |
| Net weight:  | 237 kg   |
| Gross weight:  | 259 kg   |
| Groundwater resistant from lower edge of base section: | 3000 mm  |
| Length:  | 1295 mm  |
| Width:   | 1295 mm  |
| Height:  | 1500 mm  |
| Packaging dimension:                                   | length   |
| Packaging dimension:                                   | width  |
| Packaging dimension:                                   | height   |
| Tank/drain body  |  |
| Pressure pipe connection (DN):                         | 80   |
| Pressure pipe connection (OD):                         | 90 mm  |
| Venting connection (DN):                               | 70   |
| Distance from centre of outlet pipe to tank bottom:    | 1343 mm  |
| Distance pipe bottom inlet to tank bottom:             | 753 mm   |
| Distance from centre of inlet pipe to tank bottom:     | 833 mm   |
| Distance from inlet pipe invert to top of tank:        | 747 mm   |
| Inlet nominal size (OD):                               | 160 mm   |
| Inlet nominal size (DN):                               | 150 mm   |
| Number of inlets:                                      | 1  |
| Clear width of tank (LW):                              | 1000 mm  |
| Clear width of entry (LW):                             | 800 mm   |
| Pumping volume:  | 160 l  |
| Tank volume:   | 335 l  |
| Pumping device   |  |
| Pump:  | SPF 1500   |
| Number of pumps:                                       | 2  |
| Weight, pump:  | 27 kg  |
| Connection type:                                       | Direct connection  |
| Rated current:   | 2,7 A  |
| Protection class:                                      | I  |
| Insulation class:                                      | F  |
| Cos phi - power factor:                                | 0,77   |
| Protection class (pump):                               | IP 68 (3m/48h)   |
| Temperature monitoring:                                | integrated   |
| Max. temperature (permanent) of conveyed material:     | 40 °C  |

|                                 |                                |
|---------------------------------|--------------------------------|
| Max. pumping capacity:          | 40 m <sup>3</sup> /h           |
| Max. pumping height:            | 8 m                            |
| Speed:                          | 1415 U/min                     |
| Power P1:                       | 1,4 kW                         |
| Power P2:                       | 1,1 kW                         |
| Operating mode:                 | S1                             |
| Type of pump connection cable:  | H07RN-F 7G 1.5 mm <sup>2</sup> |
| Impeller type:                  | Multi-vane impeller            |
| Free passage:                   | 40 mm                          |
| Length of mains cable for pump: | 10 m                           |
| Control                         |                                |
| Control unit:                   | Comfort                        |
| Motor protection switch:        | yes                            |
| Alarm sensor:                   | Immersion pipe                 |
| Level measurement instrument:   | Immersion pipe                 |
| Type of level measurement:      | pneumatic                      |
| Protection class control unit:  | IP 54                          |
| Operating voltage:              | 400 V                          |
| Connection type:                | Direct connection              |
| Potential-free contact:         | yes                            |
| GSM interface:                  | yes                            |
| Log book function:              | yes                            |
| Multi-line display:             | yes                            |
| Battery buffering:              | yes                            |
| Self-diagnosis system (SDS):    | yes                            |