


## Grease separator EasyClean ground Multi, NS 7, Standard, 790-1200 mm, B

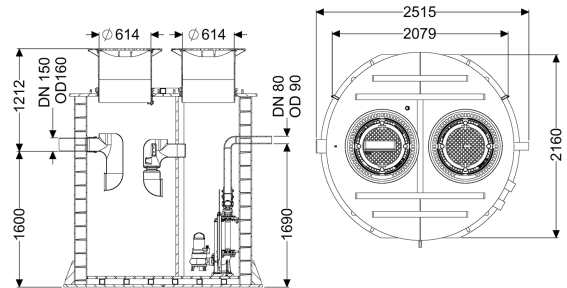

### Article information

Item no.: 96007.120B  
 GTIN: 4026092098165  
 Price group: 60

### Advantages

- Vertically adjustable upper section with odour-tight cover plates in various load classes
- Waterproof, resistant to aggressive wastewater
- Low-maintenance operation

### Description

The unit for an underground installation combines a separator for greasy wastewater incl. sludge trap, a sampling system and a pumping station. The tank of all system parts is made of permanently resistant polymer (PE). The individual system parts can be accessed for cleaning and maintenance work via two service access covers. Manual disposal takes place with the tank open. The pumping station is equipped with two submersible pumps and a backflow preventer. The submersible pumps are placed in the tank using guide rods. The pumps are actuated via a level sensor. The station is controlled by a user-friendly control unit, which can be connected to the building control system via a potential-free contact. Alternatively, alarm and collective fault messages can be sent by way of a GSM interface. A load distribution slab must be installed on site for load class D. The reinforcement drawings are available from KESSEL. 20 year polyethylene warranty.

#### Variant

Chamber system:	Twin walled re-enforced pipe chamber
Disposal variant:	Standard
Shredder-Mix-System:	no
Nominal size (NS):	7,00
SonicControl:	no
Type of disposal:	manual with suction hose
Load-bearing capacity (DIN 19901):	E2

## General characteristics

Installation situation: underground installation

## Dimensions

Net weight: 1180 kg  
 Gross weight: 1234 kg  
 Groundwater resistant from lower edge of base section: 2800 mm  
 Installation depth: 790 - 1200 mm  
 Length: 2160 mm  
 Width: 2505 mm  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

## Tank/drain body

Pressure pipe connection (DN): 90  
 Pressure pipe connection (OD): 90 mm  
 Distance pipe bottom outlet to tank bottom: 1330 mm  
 Distance pipe bottom inlet to tank bottom: 1600 mm  
 Outlet nominal size (OD): 160 mm  
 Number of outlets: 1  
 Outlet nominal size (DN): 150 mm  
 Inlet nominal size (OD): 160 mm  
 Inlet nominal size (DN): 150 mm  
 Number of inlets: 1  
 Connection inlet/outlet sockets: PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS  
 Clear width of entry (LW): 600 mm

## Coverage features

Type of cover: Cover plate  
 Cover material: Grey iron  
 Colour of cover: black  
 Height of cover: 95 mm  
 Locking: unlocked  
 Load class: B 125 (EN 124)  
 Tightness: odour-tight and surface water resistant

## Wastewater contents

Separator contents: 1440 l  
 Max. grease layer thickness: 195 mm  
 Total volume: 2140 l  
 Contents of sludge trap: 700 l  
 Storage quantity of grease: 280 l

## Pumping device

Pump: GTK 1300  
 Number of pumps: 2

Weight, pump:	27 kg
Protection class:	I
Insulation class:	H
Cos phi - power factor:	0,8
Protection class (pump):	IP 68
Max. temperature (permanent) of conveyed material:	40 °C
Max. pumping capacity:	57 m <sup>3</sup> /h
Max. pumping height:	12,4 m
Speed:	2900 U/min
Power P1:	1,3 kW
Power P2:	1 kW
Operating mode:	S3 - 30 %
Type of pump connection cable:	H07RN8-F 6G 1.5 mm <sup>2</sup>
Length of mains cable for pump:	10 m
Rated current:	2,5 A
Control	
Control unit:	Comfort
Motor protection switch:	yes
Alarm sensor:	Level sensor
Level measurement instrument:	Level sensor
Type of level measurement:	hydrostatic
Protection class control unit:	IP 54
Mains frequency:	50 Hz
Operating voltage:	400 V
Potential-free contact:	yes
GSM interface:	yes
Log book function:	yes
Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes
Type of fuse required (electrical protection):	3 x C 16 A